



SLIMFLUX BL UGR - PRO

Typology

Ultra-flat LED fixtures with lateral lighting.
Driver NOT included, to be fitted with the suitable driver.
Equipped with steel anti-fall safety cable.

Features

Side heat dissipation.
Immediate switch-on.
Colour rendering: Ra>80.
Do not use with dimmer.
If you want to dim or use the multicurrent power supply dimmer.
UGR version.
Class II fittings.
The use of the dimmable 1-10V driver, code DELT40D-10V, or DALI, code A01486, set at 550mA, makes the luminaire compliant with Italian Ministerial Decree of 24 November 2025 (CAM - Minimum Environmental Criteria for public buildings) L90B10 - 50000h.

Installation

Installations: recessed, suspended, ceiling/wall.
Surface mounting & adjustable suspension wire kits are available as accessories.

Material

Painted white aluminium body; anti-yellowing PS screen.

Usage information

SLIMFLUX 60x60 panels can be used with multi-current dimming power supply, code DELT40D-M.

Emergency

SLIMFLUX panels can be used with standby emergency kit, code KTEMR03.

Packaging

BL model: 6 pieces pack with single items' box.

PRO

220-240 Vac

Ra >80

50000 h L80B20

IP20 VI IP43 VO

Free Wire

-20°C +45°C

Risk Group 0

UGR <19


FLICKER FREE

G5 h24

Characteristic data

Power	28 W	Dimmable	No	Input	220-240 Vac	Base	Free Wire
IP	20	Optical compartment IP	43	Flux	3600 lm	PF	- -
UGR	<19	Tc	4000 K	Ra	>80	LED Warranty	G5h24
RG	RG0						

Dimensional characteristics



L	595 mm
L1	595 mm
H	35 mm

Lighting and photometric features


Flux	3600 lm
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	>80
Lifespan	50000 h
LED lifespan	L80B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
UGR	<19

Electrical characteristics

Rated power	28 W
Input voltage	220-240 Vac
Frequency	50/60 Hz
Dimmable	No
Power factor (PF)	- -
Max output current	700 mA
Operating temperature	-20°C / +45°C

Other Infotech

Flicker Free	Yes
Light source replaceability	Replaceable (LED only) light source by a professional.

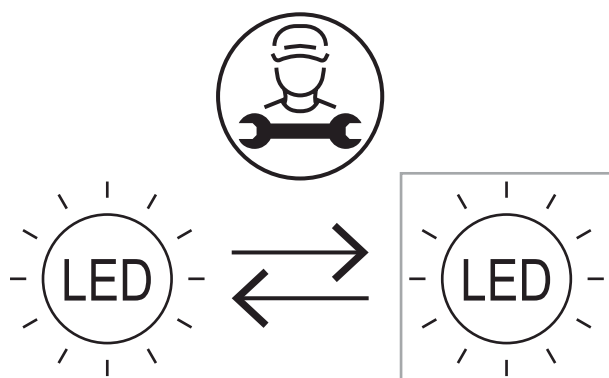

LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	--

European Directives

2009/125/EC * Ecodesign
 2011/65/EU * RoHS
 2012/19/EU * RAEE
 2014/30/EU * EMC
 2014/35/EU * LVD
 2015/863 * Amending RoHS
 2017/1369 * Regulation for Energy Labelling
 2019/2015 * Regulation for Energy Labelling
 2019/2020 * Regulation for Ecodesign
 2021/340 * Amending Reg. Energy Labelling
 2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
 CEI EN 60598-1:2022
 CEI EN 60598-2-1:2022
 CEI EN 60598-2-2:2012
 CEI EN 61000-3-2:2019 (+A1:2021)
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
 CEI EN 61547:2010
 CEI EN 62031:2021 (+A11:2022)
 CEI EN 62471:2010
 IEC/TR 62471-2:2009
 CEI EN 62493:2015
 CEI 34-141:2014

Logistics data

Item net weight	2150 gr
Barcode single item	8011905003784
Number of pieces multiple pack	6
Minimum order quantity	1
Minimum packaging	1 / 6