



## COB PRO YELLOW PHOSPHORS

### Typology

COB PRO Strips adopt advanced "Flip-Chip" technology, allowing greater compactness and higher energy efficiency.

COB PRO Strips are designed with a white profiling on both sides of the chip to prevent light dispersion and color temperature variation at the beam edges.

The circuit, enhanced with a thicker copper layer, reduces voltage drops and ensures uniformity.

All materials are selected at the highest quality of the state of the art.

The innovative protective structure ensures durability, long-term reliability, and extreme flexibility, with curves with bending radii up to 50 mm.

### Installation

Complete with 3M double-sided tape to attach to the surface.

When using double-sided tape degrease the application surface adequately.

Various cutting pitch options in different models: tight cuts down to 8.5 mm.

### Usage information

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

### Packaging



Packaged in 5 meters reels.



### Characteristic data

Power	60 W	Beam	140°	Dimmable	Yes	Input	24 Vdc
Base	Free Wire	IP	20	Tc	4000 K	Ra	90
LED Warranty	G5h24	RG	RG1				

### Dimensional characteristics

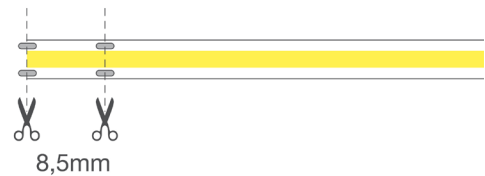

L	5000 mm
L1	8 mm
H	2.7 mm

Cutting pitch	8.5 mm
---------------	--------


## Lighting and photometric features

Beam opening	140°
Nominal flux per mt	1250 lm/m
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	90
Lifespan	50000 h
LED lifespan	L70B50
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

## Electrical characteristics

Rated power	60 W
Input voltage	24 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "F"
Operating temperature	-25°C / +35°C

## Photometry

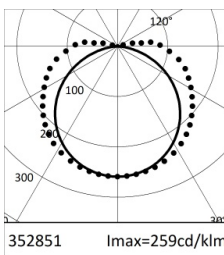

	4000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)
	Ra90		113°	153°	
Fixture Power	12W	1	3.05	8.31	324
Source Flux	1250lm	2	6.09	16.62	81
Fixture Flux	1250lm	3	9.14	24.93	36
Efficacy	104lm/W	4	12.18	33.24	20
352851 I <sub>max</sub> =259cd/klm	I <sub>max</sub>	5	15.23	41.56	13

EuLumDat file on the site

## LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

## European Directives

2009/125/EC \* Ecodesign  
2011/65/EU \* RoHS  
2012/19/EU \* RAEE  
2014/30/EU \* EMC  
2015/863 \* Amending RoHS  
2017/1369 \* Regulation for Energy Labelling  
2019/2015 \* Regulation for Energy Labelling  
2019/2020 \* Regulation for Ecodesign  
2021/340 \* Amending Reg. Energy Labelling  
2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
CEI EN 60598-1:2022  
CEI EN 60598-2-1:2022  
CEI EN 61000-3-2:2019 (+A1:2021)  
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
CEI EN 61547:2010  
CEI EN 62031:2021 (+A11:2022)  
CEI EN 62471:2010  
IEC/TR 62471-2:2009  
CEI EN 62493:2015  
CEI 34-141:2014

## Logistics data

Barcode single item	8011905352851
Number of pieces multiple pack	18
Minimum packaging	1 / 18

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products