

## SLIMFLUX BL SENSOR

**Typology**
Direct-light LED panel, equipped with sensor remote-controlled.
Via the remote control it is possible to switch the luminaire on and off, dim and select the lighting mode with motion detection or room brightness detection.

**Features**
The backlit panel is composed of a metal material back compartment providing a heat sink function.
The sensor can be removed; replacement sensor available as a separate part number (KTLP-SR).
Colour rendering: Ra>80.

**Installation**
Consider more depth for recessed installations.
Surface mounting: select the recommended frame from the accessories table.

**Material**
Body with white finish.
Anti-yellowing PS screen.


PRO | 220-240 Vac | Ra >90 | 50000 h L70B20 | IP20 VI IP40 VO | Free Wire | -25°C +40°C | Risk Group 0 | UGR <19

FLICKER FREE | G5 h24

### Characteristic data

| | | | | | | | |
|---|---|---|---|---|---|---|---|
| Power | 36 W | Dimmable | No | Input | 220-240 Vac | Base | Free Wire |
| IP | 20 | Optical compartment IP | 40 | Flux | 4000 lm | PF | 0,9 |
| UGR | <19 | Tc | 4000 K | Ra | >90 | LED Warranty | G5h24 |
| RG | RG0 | | | | | | |

## Dimensional characteristics




| | |
|---|---|
| L | 595 mm |
| L1 | 595 mm |
| H | 32 mm |
| H2 | 46 mm |

## Lighting and photometric features

| | |
|---|---|
| Flux | 4000 lm |
| CCT nominal colour temperature | 4000 K |
| Colour of the light | Natural light |
| Colour rendering index | >90 |
| Lifespan | 50000 h |
| LED lifespan | L70B20 |
| UGR | <19 |

## Electrical characteristics


| | |
|---|---|
| Rated power | 36 W |
| Input voltage | 220-240 Vac |
| Frequency | 50/60 Hz |
| Dimmable | No |
| Power factor (PF) | 0,9 |
| Operating temperature | -25°C / +40°C |


## Other Infotech

| | |
|---|---|
| Flicker Free | Yes |
| Light source replaceability | Replaceable (LED only) light source by a professional. |
| Control gear replaceability | Replaceable control gear by a professional. |



Technisches Datenblattsheet
Fiche technique
Ficha de datos
Technical datasheet
Scheda tecnica

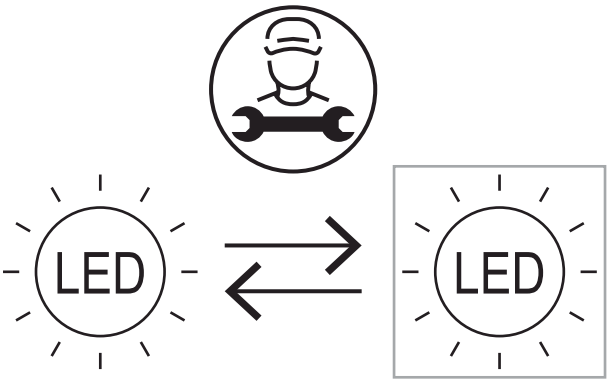

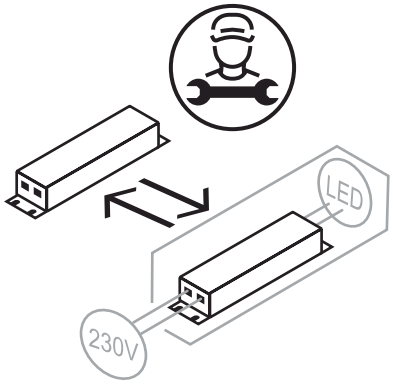
## LED Warranty

| | |
|---|---|
| G5h24 | Full Guarantee<br>5 years<br>(24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions. |

## European Directives

2009/125/EC * Ecodesign
2011/65/EU * RoHS
2012/19/EU * RAEE
2014/30/EU * EMC
2014/35/EU * LVD
2015/863 * Amending RoHS
2017/1369 * Regulation for Energy Labelling
2019/2015 * Regulation for Energy Labelling
2019/2020 * Regulation for Ecodesign
2021/340 * Amending Reg. Energy Labelling
2021/341 * Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)
CEI EN 60598-1:2022
CEI EN 60598-2-1:2022
CEI EN 60598-2-2:2012
CEI EN 61000-3-2:2019 (+A1:2021)
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
CEI EN 61547:2010
CEI EN 62031:2021 (+A11:2022)
CEI EN 62471:2010
IEC/TR 62471-2:2009
CEI EN 62493:2015
CEI 34-141:2014

## Logistics data

| | |
|---|---|
| Item net weight | 1500 gr |
| Barcode single item | 8011905331290 |
| Number of pieces multiple pack | 6 |
| Minimum order quantity | 6 |
| Minimum packaging | 6 / 6 |

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibilityderiving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products