




24V DURAstrip DRIVER

Features

Driver for LED strips.
SELV equivalent; protection device in case of short circuit or overload in the secondary circuit.
24V drivers have loose wires connection.

Power supply

Dimmable Driver Compatibility.
Prior to installation, verify the compatibility between the dimmable driver and the lighting control and automation system used in the installation.
Certain analog, digital, or building automation systems may present functional limitations or compatibility issues that shall be evaluated in advance to ensure proper system operation.

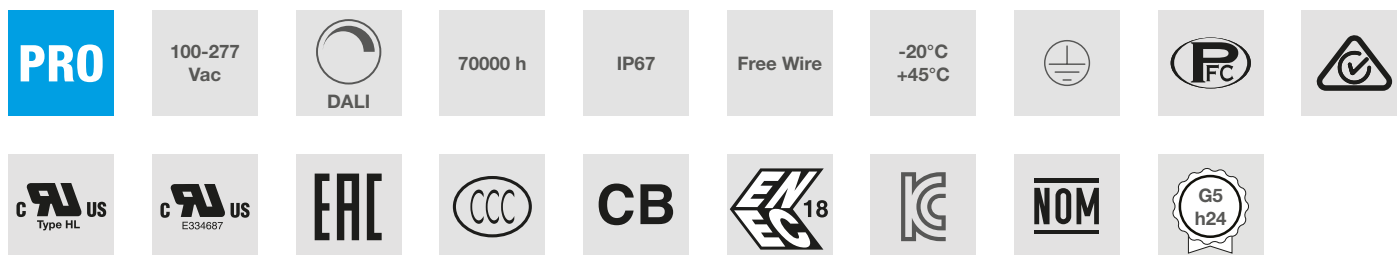

Characteristic data

Power	150 W	Dimmable	DALI	Input	100-277 Vac	Base	Free Wire
IP	67	PF	0,9	LED Warranty	G5h24		

Dimensional characteristics

L	186 mm
L1	63 mm
H	32 mm

Lighting and photometric features

Lifespan	70000 h
----------	---------

Electrical characteristics

Rated power	150 W
Input voltage	100-277 Vac
Frequency	50/60 Hz
Output voltage	24 Vdc
Dimmable	DALI
Power factor (PF)	0,9
Operating temperature	-20°C / +45°C

Other Infotech

Max Case Temperature	75
----------------------	----

LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

European Directives

2009/125/EC * Ecodesign
2011/65/EU * RoHS
2012/19/EU * RAEE
2014/30/EU * EMC
2014/35/EU * LVD
2015/863 * Amending RoHS
2017/1369 * Regulation for Energy Labelling
2019/2015 * Regulation for Energy Labelling
2019/2020 * Regulation for Ecodesign
2021/340 * Amending Reg. Energy Labelling
2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
CEI EN 61000-3-2:2019 (+A1:2021)
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
CEI EN 61347-1:2016 (+A1:2021)
CEI EN 61347-2-13:2015 (+A1:2018)
CEI EN 61547:2010

Logistics data

Item net weight	685 gr
Barcode single item	8011905357337
Minimum order quantity	1
Minimum packaging	1 / 1