



COB PRO YELLOW PHOSPHORS

Typology

COB PRO Strips adopt advanced "Flip-Chip" technology, allowing greater compactness and higher energy efficiency.

COB PRO Strips are designed with a white profiling on both sides of the chip to prevent light dispersion and color temperature variation at the beam edges.

The circuit, enhanced with a thicker copper layer, reduces voltage drops and ensures uniformity.

All materials are selected at the highest quality of the state of the art.

The innovative protective structure ensures durability, long-term reliability, and extreme flexibility, with curves with bending radii up to 50 mm.

Installation

Complete with 3M double-sided tape to attach to the surface.

When using double-sided tape degrease the application surface adequately.

The cutting pitch is 50 mm.

Usage information

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

Packaging



The 6W/m model is packaged in 3 m rolls.



Characteristic data

Power	18 W	Beam	140°	Dimmable	Yes	Input	24 Vdc
Base	Free Wire	IP	20	Tc	4000 K	Ra	90
LED Warranty	G5h24	RG	RG1				

Dimensional characteristics

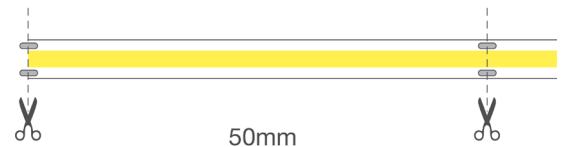

L	3000 mm
L1	3 mm
H	1.4 mm

Cutting pitch	50 mm
---------------	-------

Lighting and photometric features

Beam opening	140°
Nominal flux per mt	520 lm/m
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	90
Lifespan	50000 h
LED lifespan	L70B50
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

Electrical characteristics

Rated power	18 W
Input voltage	24 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "G"
Operating temperature	-25°C / +35°C

Photometry

	4000K		
	Ra90		
	Fixture Power	6W	
	Source Flux	520lm	
	Fixture Flux	520lm	
	Efficacy	87lm/W	
352820	Imax=232cd/klm	Imax	120cd

EulumDat file on the site

LED Warranty

G5h24	<p>Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.</p>
-------	--

European Directives

2009/125/EC * Ecodesign
2011/65/EU * RoHS
2012/19/EU * RAEE
2014/30/EU * EMC
2015/863 * Amending RoHS
2017/1369 * Regulation for Energy Labelling
2019/2015 * Regulation for Energy Labelling
2019/2020 * Regulation for Ecodesign
2021/340 * Amending Reg. Energy Labelling
2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
CEI EN 60598-1:2022
CEI EN 60598-2-1:2022
CEI EN 61000-3-2:2019 (+A1:2021)
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
CEI EN 61547:2010
CEI EN 62031:2021 (+A11:2022)
CEI EN 62471:2010
IEC/TR 62471-2:2009
CEI EN 62493:2015
CEI 34-141:2014

Logistics data

Barcode single item	8011905352820
Minimum packaging	1 / 20