



COB PRO YELLOW PHOSPHORS

Typology

COB PRO Strips adopt advanced "Flip-Chip" technology, allowing greater compactness and higher energy efficiency.

COB PRO Strips are designed with a white profiling on both sides of the chip to prevent light dispersion and color temperature variation at the beam edges.

The circuit, enhanced with a thicker copper layer, reduces voltage drops and ensures uniformity.

All materials are selected at the highest quality of the state of the art.

The innovative protective structure ensures durability, long-term reliability, and extreme flexibility, with curves with bending radii up to 50 mm.

Installation

Complete with 3M double-sided tape to attach to the surface.

When using double-sided tape degrease the application surface adequately.

The cutting pitch is 50 mm.

Usage information

Dimmable 0-100% Flicker Free

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

Packaging



The 6W/m model is packaged in 3 m rolls.



Characteristic data

Power	18 W	Beam	140°	Dimmable	Yes	Input	24 Vdc
Base	Free Wire	IP	20	Tc	4000 K	Ra	90
LED Warranty	G5h24	RG	RG1				

Dimensional characteristics

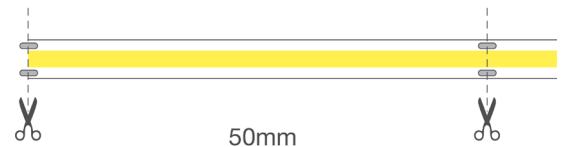

L	3000 mm
L1	5 mm
H	1.4 mm

Cutting pitch	50 mm
---------------	-------


Lighting and photometric features

Beam opening	140°
Nominal flux per mt	550 lm/m
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	90
Lifespan	50000 h
LED lifespan	L70B50
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

Electrical characteristics

Rated power	18 W
Input voltage	24 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "G"
Operating temperature	-25°C / +35°C

Photometry

 <p>352837 I_{max}=232cd/klm</p>	4000K	
	Ra90	
	Fixture Power	6W
	Source Flux	550lm
	Fixture Flux	550lm
	Efficacy	92lm/W
	I _{max}	127cd

EulumDat file on the site

LED Warranty

G5h24	<p>Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.</p>
-------	--

European Directives

2009/125/EC * Ecodesign
2011/65/EU * RoHS
2012/19/EU * RAEE
2014/30/EU * EMC
2015/863 * Amending RoHS
2017/1369 * Regulation for Energy Labelling
2019/2015 * Regulation for Energy Labelling
2019/2020 * Regulation for Ecodesign
2021/340 * Amending Reg. Energy Labelling
2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
CEI EN 60598-1:2022
CEI EN 60598-2-1:2022
CEI EN 61000-3-2:2019 (+A1:2021)
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
CEI EN 61547:2010
CEI EN 62031:2021 (+A11:2022)
CEI EN 62471:2010
IEC/TR 62471-2:2009
CEI EN 62493:2015
CEI 34-141:2014

Logistics data

Barcode single item	8011905352837
Minimum packaging	1 / 20

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibility deriving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products