

## EXTRA NARROW DURASTRIP IP65

The EXTRA NARROW series is a concentrate of quality materials that is shared with other DURASTRIP: high quality choices to ensure a professional level performance, excellent heat dissipation and long duration, Ra >90. EXTRA NARROW is the range with the smallest substrate in the entire collection. Just 5 mm or 6 mm wide, it solves all needs not only connected to confined spaces but above all, for characteristic lighting design. To be used with thin section profiles in the range. The type of LED source used and the short LEDs' center to center distance eliminate the dot effect also in profiles with lenses that are very close to the base.

### Installation

Complete with 3M double-sided tape to attach to the surface. When using double-sided tape degrease the application surface adequately.

### Usage information

Dimmable 0-100% Flicker Free  
DALI - DMX - 1-10  
Analogue and digital domotic control systems  
Push Dali with ZKCDA controllers  
CASAMBI compatible

### Packaging

Packaged in 5 meters reels.  
Or custom products cut to specific lengths see page 11, 322.

### LED

LED 2216: 180 LED/m - 7.2W/m  
LED 2216: 300 LED/m - 11W/m  
24VDC  
Ra>90  
Lifetime: >50,000h  
Warranty: 5 years

### Colour of the light

Choice of white colour temperatures.

### Binning

ANSI/SDCM: 2 step.  
2200K - 2700K - 3000K - 4000K - 6000K

### Connections


Maximum connection length 5 m. Max 4A.  
For longer connections, connect in series or parallel, see diagram.  
Strips can be cut to size by following the cutting indications printed on the strips.

<b>PRO</b>	24 Vdc	Ra 90		50000 h L70B20
IP65	Connector	-25°C +35°C	Risk Group 0	

### Characteristic data

Beam	120°	Dimmable	Yes	Input	24 Vdc	Base	Connector
IP	65	Tc	2200 K	Ra	90	LED Warranty	G5h24
RG	RG0						

## Dimensional characteristics

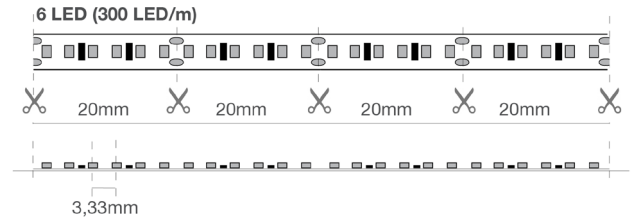

L	5000 mm
L1	8 mm
H	4 mm

Cutting pitch	20 mm
LED pitch	3.33 mm

## Lighting and photometric features

Beam opening	120°
Nominal flux per mt	720 lm/m
CCT nominal colour temperature	2200 K
Colour of the light	Warm light
Colour rendering index	90
Lifespan	50000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
Mercury	0 mg

## Electrical characteristics

Input voltage	24 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "G"
Number of cycles	100000
Operating temperature	-25°C / +35°C
Operating position	360°

## Photometry

	2200K	H(m)	D(m)	Emax(lx)		
	Ra90		117°			
Fixture Power	11W	1	3.25	227		
Source Flux	720lm	2	6.50	57		
Fixture Flux	720lm	3	9.74	25		
Efficacy	65lm/W	4	12.99	14		
956684	Imax=316cd/klm	Imax	227cd	5	16.24	9

EulumDat file on the site

## LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

## European Directives

2009/125/EC \* Ecodesign  
 2011/65/EU \* RoHS  
 2012/19/EU \* RAEE  
 2014/30/EU \* EMC  
 2015/863 \* Amending RoHS  
 2017/1369 \* Regulation for Energy Labelling  
 2019/2015 \* Regulation for Energy Labelling  
 2019/2020 \* Regulation for Ecodesign  
 2021/340 \* Amending Reg. Energy Labelling  
 2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
 CEI EN 60598-1:2022  
 CEI EN 60598-2-1:2022  
 CEI EN 61000-3-2:2019 (+A1:2021)  
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
 CEI EN 61547:2010  
 CEI EN 62031:2021 (+A11:2022)  
 CEI EN 62471:2010  
 IEC/TR 62471-2:2009  
 CEI EN 62493:2015  
 CEI 34-141:2014

## Logistics data

Item net weight	203 gr
Barcode single item	8011905956684
Number of pieces multiple pack	20
Minimum order quantity	20
Minimum packaging	20 / 20