REGLETTE T5 CCT

Typology
LED T5 replacement professional undercabinet/ceiling batten light in the most diffused sizes.

Features
It attaches to both walls and ceilings using the clip included.
Filino T5 batten can be installed in series code KTLRT, up to a maximum of 10 units (18 W / 23 W); 15 units (8/10 W / 14 W); 20 units 4 W.
Exceptional light quality & easy fixing with the clips provided; On/off switch on the batten body.
Free-wire connection: use the accessory cable code KTLRT-CORD if a plug is required.
Filino T5 batten can be installed in series by joining together the units or using the accessory connection cable, code KTLRT.

Material
Heat resistant, anti-yellowing plastic body.

Applications
Shelves lighting for retail sector, over- and under-shelves, etc.

BASIC | 220-240 Vac | Ra >80 | 20000 h L70B50 | IP20 | Wire | -25°C +35°C | Risk Group 0

130° | G2

Characteristic data

Power	8 W	Beam	130°	Dimmable	No	Input	220-240 Vac
Base	Wire	IP	20	Flux	900 lm	Axis	400 cd
PF	0.51	Tc	3000-4000-6400 K	Ra	>80	LED Warranty	G2
RG	RG0						

Dimensional characteristics

L	612 mm
L1	25 mm
H	30 mm

Technisches Datenblattsheet
Fiche technique
Ficha de datos
Technical datasheet
Scheda tecnica

Lighting and photometric features

Beam opening	130°
Flux	900 lm
Axis	400 cd
CCT nominal colour temperature	3000-4000-6400 K
Colour of the light	CCT
Colour rendering index	>80
Lifespan	20000 h
LED lifespan	L70B50
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

Electrical characteristics

Rated power	8 W
Input voltage	220-240 Vac
Frequency	50/60 Hz
Dimmable	No
Power factor (PF)	0.51
Input current	0.07 A
Energy efficiency class	This product contains a light source of energy efficiency class "D"
Number of cycles	100000
Operating temperature	-25°C / +35°C

Other Infotech

Reflector	Yes
Light source replaceability	Non-replaceable light source.
Control gear replaceability	Non-replaceable control gear.

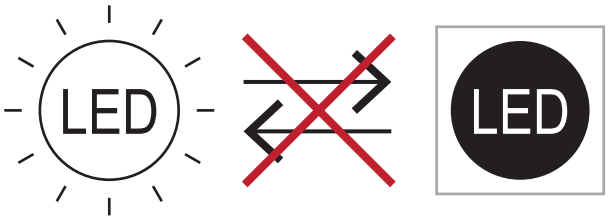

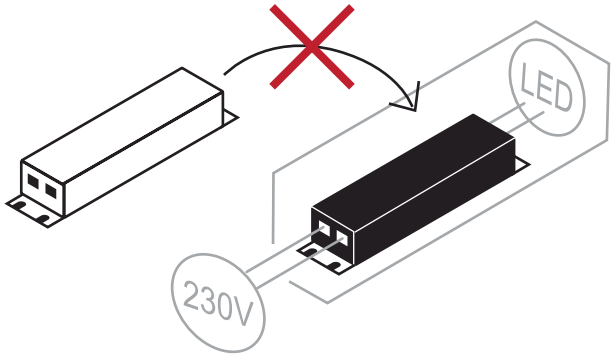

LED Warranty

G2	Up to 2 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.

European Directives	Product standards
2009/125/EC * Ecodesign	CEI EN 55015:2020 (+A11:2020)
2011/65/EU * RoHS	CEI EN 60598-1:2022
2012/19/EU * RAEE	CEI EN 60598-2-1:2022
2014/30/EU * EMC	CEI EN 61000-3-2:2019 (+A1:2021)
2014/35/EU * LVD	CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
2015/863 * Amending RoHS	CEI EN 61547:2010
2017/1369 * Regulation for Energy Labelling	CEI EN 62031:2021 (+A11:2022)
2019/2015 * Regulation for Energy Labelling	CEI EN 62471:2010
2019/2020 * Regulation for Ecodesign	IEC/TR 62471-2:2009
2021/340 * Amending Reg. Energy Labelling	CEI EN 62493:2015
2021/341 * Amending Reg. Ecodesign	CEI 34-141:2014

Logistics data

Item net weight	150 gr
Barcode single item	8011905338541
Number of pieces multiple pack	10
Minimum order quantity	1
Minimum packaging	1 / 10

All parts of this document are Duralamp ownership. All rights reserved. This document and the included information are provided without any responsibilityderiving from mistakes or omissions. No part of this document can be cut, reproduced or used without written authorization. Duralamp maintains the right to change the included data without notice due to improvements of the products