

## DURASTRIP PRO240 IP65

### Typology

24V Strip LED.

### Features

PRO240 is a range of strips with significant power, up to 24W/m.

With an efficiency of 110lm/W and thanks to a narrow space between the LED sources, PRO240 is the strip to use when strong light emission is required, for example for installations at great heights.

At the same time it guarantees extreme uniformity and colour reliability, made superlative by Ra>95.

PRO240 are new generation strips which are increasingly efficient and reliable over time.

Available in an IP20 and IP65 version.

### Installation

Complete with 3M double-sided tape to attach to the surface and jumpers to be screwed to the surface.

When using double-sided tape degrease the application surface adequately.

**Always use with aluminium profiles for heat dissipation.**

### Usage information

Dimmable 0-100%

DALI - DMX - 1-10

Analogue and digital domotic control systems

Push Dali with ZKCDAFF controllers

CASAMBI compatible

### Power supply

Max current for single power supply: 4A.

### Packaging

Packaged in 5 meters reels.

This product can be customized: consult the catalogue or the sales force for details.

### Colour of the light

Choice of white colour temperatures.

### Binning

ANSI/SDCM: 3 step.


### Connections

IP65: complete with a 15 cm long IP65/68 M/F cable on 2 sides.

Maximum connection length 5 m.

Strips can be cut to size by following the cutting indications printed on the strips.


For IP65/IP68 strips, restore the IP protection after cutting.

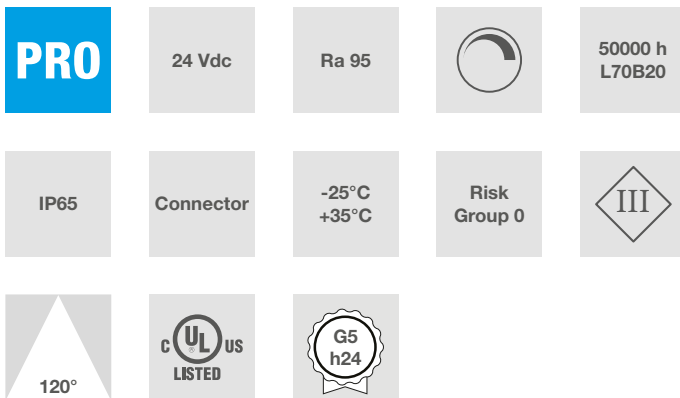

### Characteristic data

Power	120 W	Beam	120°	Dimmable	Yes	Input	24 Vdc
Base	Connector	IP	65	Tc	3000 K	Ra	95
LED Warranty	G5h24	RG	RG0				

## Dimensional characteristics

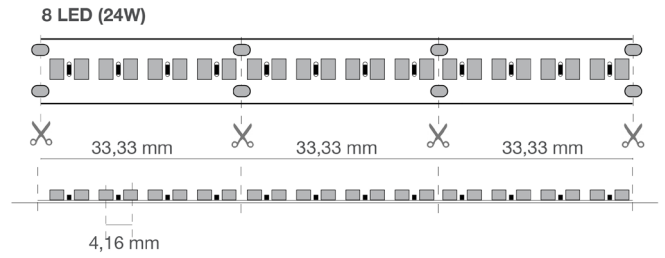

L	5000 mm
L1	12 mm
H	5 mm

Cutting pitch	33.33 mm
LED pitch	4.16 mm

## Lighting and photometric features

Beam opening	120°
Nominal flux per mt	2090 lm/m
CCT nominal colour temperature	3000 K
Colour of the light	Warm light
Colour rendering index	95
Lifespan	50000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
Mercury	0 mg

## Electrical characteristics

Rated power	120 W
Input voltage	24 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "F"
Operating temperature	-25°C / +35°C
Operating position	360°

## Photometry

	3000K	H(m)	D1(m)	D2(m)	E <sub>max</sub> (lx)	
	Ra95		108°	109°		
Fixture Power	24W	1	2.74	2.79	748	
Source Flux	2090lm	2	5.47	5.57	187	
Fixture Flux	2090lm	3	8.21	8.36	83	
Efficacy	87lm/W	4	10.94	11.14	47	
954383 I <sub>max</sub> =358cd/klm	I <sub>max</sub>	748cd	5	13.68	13.93	30

EulumDat file on the site

## LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

## European Directives

2009/125/EC \* Ecodesign  
 2011/65/EU \* RoHS  
 2012/19/EU \* RAEE  
 2014/30/EU \* EMC  
 2015/863 \* Amending RoHS  
 2017/1369 \* Regulation for Energy Labelling  
 2019/2015 \* Regulation for Energy Labelling  
 2019/2020 \* Regulation for Ecodesign  
 2021/340 \* Amending Reg. Energy Labelling  
 2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
 CEI EN 60598-1:2022  
 CEI EN 60598-2-1:2022  
 CEI EN 61000-3-2:2019 (+A1:2021)  
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
 CEI EN 61547:2010  
 CEI EN 62031:2021 (+A11:2022)  
 CEI EN 62471:2010  
 IEC/TR 62471-2:2009  
 CEI EN 62493:2015  
 CEI 34-141:2014

## Logistics data

Item net weight	290 gr
Barcode single item	8011905954383
Number of pieces multiple pack	10
Minimum order quantity	1
Minimum packaging	1 / 10