



DURASTRIP HIVOLT ARCH DIMMABLE - 120V

Typology

Mains voltage strip, dimmable.

Features

Dimmable version supplied with TRIAC soft dimming achieved with the built in control Chip.
Strip protected from over voltage & and overheating failure in each 2.30 cm strip segment.
System features miniature electrical connections and a closing end cap similar to the main strip.
Supplied already cut and wired in the requested measurement, may be provided with IP40 or IP65 rating depending on the installation environment.
WARNING: the cutting pitch is 203 mm.

Installation

We recommend to order the assembly clips considering to use 4 clips for every metre. Any particular requests will be specified in the project form.

Material

Fitted with latest generation weatherproof and UV resistant Extruded PVC body for exterior use. Finished with white base and sides along with a transparent upper screen for a clean light emission.

Usage information

230V: TRIAC dimmable, leading edge 10-100%.
Consult the list of compatible dimmers.
120V: Dimmable ELV 10-100%

Accessories

PC clip for anchoring.

Packaging

Supplied already cut to measures.
Complete with a cable of 1.50 m (black) equipped with a Schuko plug (full collar Schuko IP44) or supplied with free wires (IP65).

LED

Lifetime: internal use >50,000h; external use>35,000h

Colour of the light

Choice of white colour temperatures.

Binning

ANSI/SDCM: 3 step 1 bin.

Connections

Up to 50 metres with a single power supply.


PRO	120 Vac	Ra 90		35000 h L70B20	IP40/65	Connector / Free terminals	-25°C +35°C	Risk Group 0	

Characteristic data


Beam	110°	Dimmable	Yes	Input	120 Vac	Base	Connector/Free terminals
IP	40/65	Tc	3000 K	Ra	90	LED Warranty	G3
RG	RG0						

Dimensional characteristics

DURASTRIP HiVolt ARCH DIMMABLE - 120V - IP40 Terminal "IN" with plug or free wires

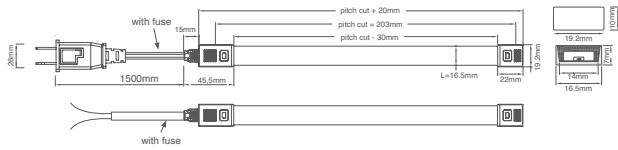

DURASTRIP HiVolt ARCH DIMMABLE - 120V - IP65 Terminal "EX" with plug or free wires

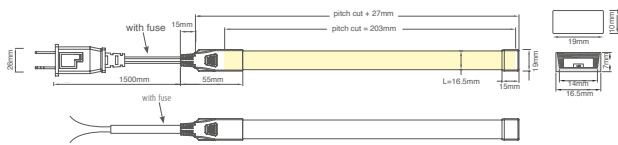

L	1000 mm
L1	16.5 mm
H	7 mm

Cutting pitch	203 mm
---------------	--------

Lighting and photometric features

Beam opening	110°
Nominal flux per mt	1050 lm/m
CCT nominal colour temperature	3000 K
Colour of the light	Warm light
Colour rendering index	90
Lifespan	35000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
Mercury	0 mg

Electrical characteristics

Input voltage	120 Vac
Frequency	60 Hz
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "F"
Number of cycles	100000
Operating temperature	-25°C / +35°C
Operating position	360°

Photometry

	3000K	H(m)	D1(m)	D2(m)	Emax(lx)		
	Ra90		102°	111°			
	Fixture Power	12W	1	2.46	2.91	400	
	Source Flux	1050lm	2	4.92	5.82	100	
	Fixture Flux	1050lm	3	7.37	8.73	44	
	Efficacy	88lm/W	4	9.83	11.64	25	
	950385	Imax=381cd/klm	Imax	400cd	5	12.29	14.55

EulumDat file on the site

LED Warranty

G3	Up to 3 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

European Directives

2009/125/EC * Ecodesign
 2011/65/EU * RoHS
 2012/19/EU * RAEE
 2014/30/EU * EMC
 2014/35/EU * LVD
 2015/863 * Amending RoHS
 2017/1369 * Regulation for Energy Labelling
 2019/2015 * Regulation for Energy Labelling
 2019/2020 * Regulation for Ecodesign
 2021/340 * Amending Reg. Energy Labelling
 2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
 CEI EN 60968:2016
 CEI EN 61000-3-2:2019 (+A1:2021)
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
 CEI EN 61547:2010
 CEI EN 62031:2021 (+A11:2022)
 CEI EN 62471:2010
 IEC/TR 62471-2:2009
 CEI EN 62560:2013 (+A1:2017/+A11:2020)
 CEI 34-141:2014

Logistics data

Minimum order quantity	1
Minimum packaging	1 / 1