




## CONSTANT CURRENT DRIVER

### Features

Can be used with fittings with replaceable remote driver.  
220÷240 V 50/60 Hz  
Lifetime 50000 h.

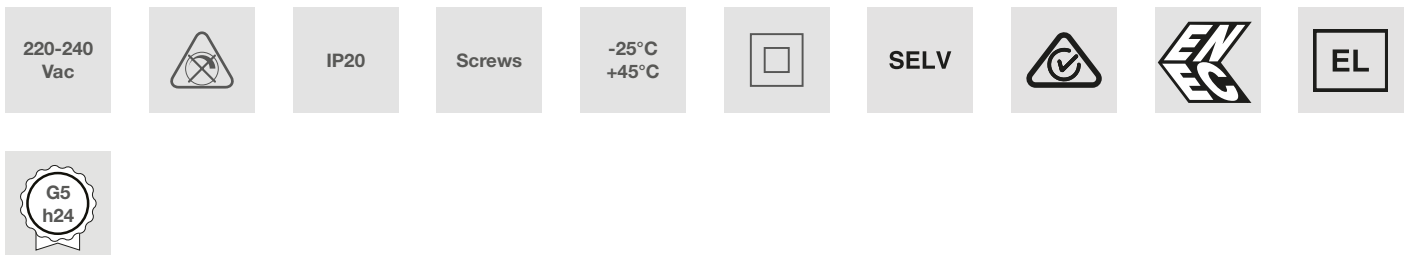

### Characteristic data

Power	40 W	Dimmable	No	Input	220-240 Vac	Base	Screws
IP	20	PF	0,95	LED Warranty	G5h24		

### Dimensional characteristics

L	119 mm
L1	43 mm
H	28 mm

### Electrical characteristics

Rated power	40 W
Input voltage	220-240 Vac
Dimmable	No
Power factor (PF)	0,95
Max output current	600 mA
Operating temperature	-25°C / +45°C

### LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

## European Directives

2009/125/EC \* Ecodesign  
 2011/65/EU \* RoHS  
 2012/19/EU \* RAEE  
 2014/30/EU \* EMC  
 2014/35/EU \* LVD  
 2015/863 \* Amending RoHS  
 2017/1369 \* Regulation for Energy Labelling  
 2019/2015 \* Regulation for Energy Labelling  
 2019/2020 \* Regulation for Ecodesign  
 2021/340 \* Amending Reg. Energy Labelling  
 2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
 CEI EN 61000-3-2:2019 (+A1:2021)  
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
 CEI EN 61347-1:2016 (+A1:2021)  
 CEI EN 61347-2-13:2015 (+A1:2018)  
 CEI EN 61547:2010

## Logistics data

Item net weight	195 gr
Barcode single item	8011905325930
Minimum order quantity	1
Minimum packaging	1 / 1