



DECO LED UP CANDLE

Typology

Immediate retro-fit of incandescent lamps, perfect replacement of opal incandescent lamps, no more available on the European market.

Features

Uniformly diffused lighting on the axes.

Material


The body of the lamp is in termoconductive material to optimise heat dissipation; ultralight cover.

Beam

240° - Antiglare opal finish of the lamp cover.

Notes

Disponibili su richiesta in version 110-132V AVAILABLE UPON REQUEST.



Characteristic data

Power	5.3 W	Beam	240°	Dimmable	No	Input	220-240 Vac
Base	E14	IP	20	Flux	470 lm	PF	0,5
Tc	3000 K	Ra	>80	LED Warranty	G2		

Dimensional characteristics



Ø	37 mm
H	99 mm
H Tolerance	± 3 mm


Lighting and photometric features

Beam opening	240°
Flux	470 lm
CCT nominal colour temperature	3000 K
Colour of the light	Warm light
Colour rendering index	>80
Lifespan	20000 h
LED lifespan	L70B50
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
Mercury	0 mg

Electrical characteristics

Rated power	5.3 W
Input voltage	220-240 Vac
Frequency	50 Hz
Dimmable	No
Power factor (PF)	0,5
Input current	0.04 A
Weighted energy consumption	5 kWh/1000h
Number of cycles	100000
Operating temperature	-25°C / +35°C
Equivalence with incandescent lamp	40
Operating position	360°

Spectrometry

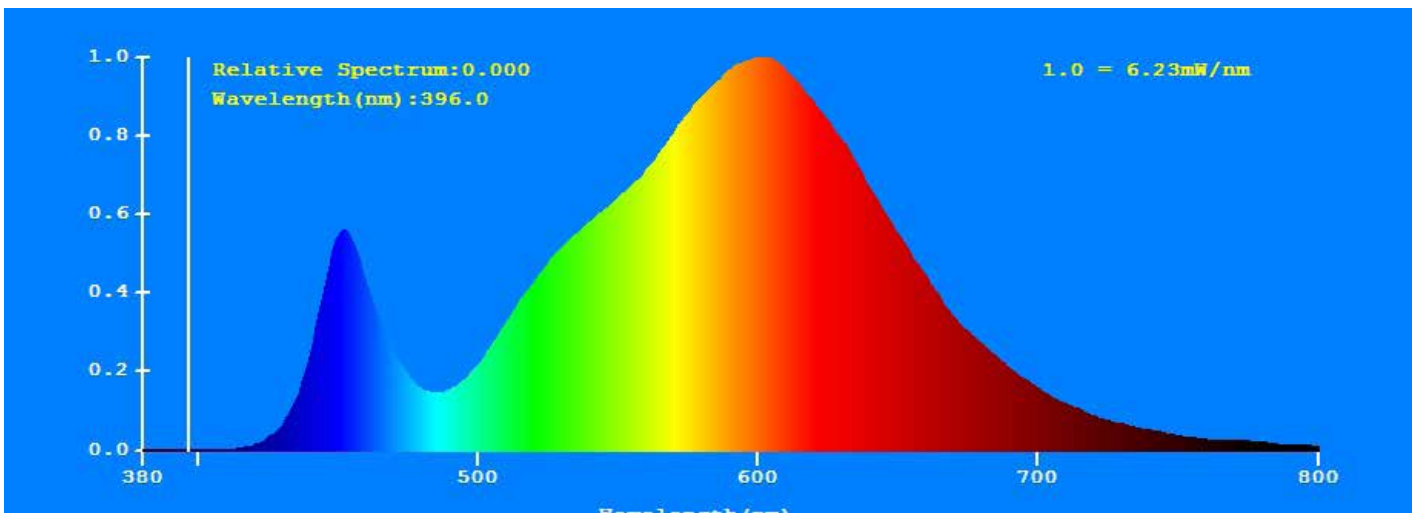

LED Warranty

G2	Up to 2 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

European Directives

2009/125/EC, 244/2009, 859/2009, 1194/2012, 2015/1428, 2010/30/EU, 874/2012, 2011/65/EU, 2012/19/EU, 2014/30/EU, 2014/35/EU, 2015/863

Product standards

CEI EN 55015:2020
CEI EN 60968:2016
CEI EN 61000-3-2:2019
CEI EN 61000-3-3:2014
CEI EN 61547:2010
CEI EN 62031:2009
CEI EN 62031/A1/A2:2015
CEI EN 62471:2010
IEC TR 62471-2:2009
CEI EN 62560:2013
CEI EN 62560/A1:2017
CEI 34-141:2014

Logistics data

Item net weight	20 gr
Barcode single item	8011905836092
Number of pieces multiple pack	10
Barcode multiple pack	8011905781378