



## DURASTRIP HE SHORT CUT

### Typology

Extreme precision, surprising efficiency.  
A high efficiency range to meet the needs of prestigious projects.  
Extreme precision, surprising efficiency, more than 140 lm/watt.  
A high efficiency range to meet the needs of prestigious projects.  
Each model meets specific installation needs and all share excellent efficiency.

### Installation

Complete with 3M double-sided tape to attach to the surface.  
When using double-sided tape degrease the application surface adequately.

### Usage information

Dimmable 0-100% Flicker Free  
DALI - DMX - 1-10  
Analogue and digital domotic control systems  
Push Dali with ZKCDAFF controllers  
CASAMBI compatible

### Power supply

Max current for single power supply: 4A.

### Packaging

Packaged in 5 meters reels.

### Binning

SDCM from <2 to <6.

### Connections


IP20: terminals with free wires.

<b>PRO</b>	24 Vdc	Ra 90		50000 h L70B50	IP20	-25°C +35°C	Risk Group 1		

### Characteristic data

Power	55 W	Beam	120°	Dimmable	Yes	Input	24 Vdc
IP	20	Tc	2700 K	Ra	90	LED Warranty	G5h24
RG	RG1						

## Dimensional characteristics

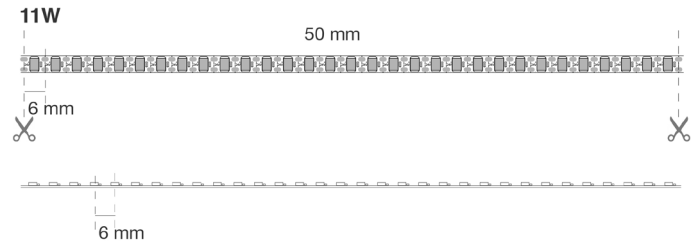

L	5000 mm
L1	5 mm
H	1.5 mm

Cutting pitch	6.5 mm
LED pitch	6 mm

## Lighting and photometric features

Beam opening	120°
Nominal flux per mt	1440 lm/m
CCT nominal colour temperature	2700 K
Colour of the light	Warm light
Colour rendering index	90
Lifespan	50000 h
LED lifespan	L70B50
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

## Electrical characteristics

Rated power	55 W
Input voltage	24 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "E"
Operating temperature	-25°C / +35°C

## Photometry

	2700K	H(m)	D(m)	E <sub>max</sub> (lx)
	Ra90		116°	
Fixture Power	11W	1	3.21	487
Source Flux	1440lm	2	6.42	122
Fixture Flux	1440lm	3	9.63	54
Efficacy	131lm/W	4	12.85	30
353162 I <sub>max</sub> =338cd/klm	I <sub>max</sub>	487cd	16.06	19

EulumDat file on the site

## LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

## European Directives

2009/125/EC \* Ecodesign  
 2011/65/EU \* RoHS  
 2012/19/EU \* RAEE  
 2014/30/EU \* EMC  
 2015/863 \* Amending RoHS  
 2017/1369 \* Regulation for Energy Labelling  
 2019/2015 \* Regulation for Energy Labelling  
 2019/2020 \* Regulation for Ecodesign  
 2021/340 \* Amending Reg. Energy Labelling  
 2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
 CEI EN 60598-1:2022  
 CEI EN 60598-2-1:2022  
 CEI EN 61000-3-2:2019 (+A1:2021)  
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
 CEI EN 61547:2010  
 CEI EN 62031:2021 (+A11:2022)  
 CEI EN 62471:2010  
 IEC/TR 62471-2:2009  
 CEI EN 62493:2015  
 CEI 34-141:2014

## Logistics data

Barcode single item	8011905353162
Number of pieces multiple pack	20
Minimum order quantity	1
Minimum packaging	1 / 20