



## ALL-IN-ONE MULTIPOWER ZOOM CCT

### Typology

Professional LED projectors for three phase track mounting. Complete with power selection, colour temperature selection and zoom option for spot or wide beam selection. Selectable powers: 25W, 30W, 35W. One luminaire replaces 27 configurations and solves all spot or wide-beam lighting needs. Adjustable from 0° to -90° on the vertical plane and 350° on the horizontal plane. Electronic power supply integrated in the track adapter.

### Features

Two models with 3 selectable powers. Light colour selector on luminaire body: 2700K-3500K-4000K. Adjustable 'zoom' optical system for a continuously variable beam from spot 24° to flood 60°.

### Installation

Mounting on 3 phases electrical tracks; fixtures equipped with a safety lock to fix to the tracks.

### Material

Die-cast painted aluminium body; black or white colour.

### Beam

High efficiency Ra>90 LED Chip on Board.

### Notes


Do not use with dimmer.

<b>PLUS</b>	220-240 Vac	Ra >90		30000 h L70B20	IP20	Eurostandard	-25°C +35°C	Risk Group 1	
	24°-60°	<b>FLICKER FREE</b>							

### Characteristic data

Beam	24°-60°	Dimmable	No	Input	220-240 Vac	Base	Eurostandard
IP	20	PF	0,90	Tc	2700-3000-4000 K	Ra	>90
LED Warranty	G3	RG	RG1	Color	White		

## Dimensional characteristics



L	170 mm
Ø	80 mm
H	250 mm
H2	185 mm

## Lighting and photometric features

Beam opening	24°-60°
Flux	2250-2700-3150 lm
Axis	9100-11000-12800 cd
CCT nominal colour temperature	2700-3000-4000 K
Colour of the light	CCT
Colour rendering index	>90
Lifespan	30000 h
LED lifespan	L70B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

## Electrical characteristics



Rated power	25-30-35 W
Input voltage	220-240 Vac
Frequency	50/60 Hz
Dimmable	No
Power factor (PF)	0,90
Weighted energy consumption	35 kWh/1000h
Operating temperature	-25°C / +35°C

## Photometry

EuLumDat file on the site

## Other Infotech

Flicker Free	Yes
Light source replaceability	Replaceable (LED only) light source by a professional.
Control gear replaceability	Replaceable control gear by a professional.

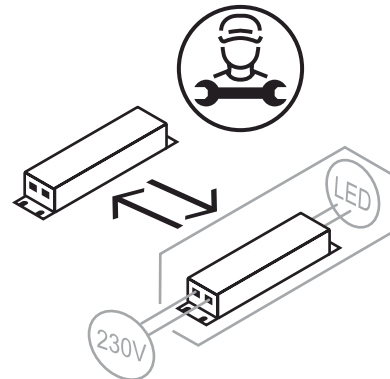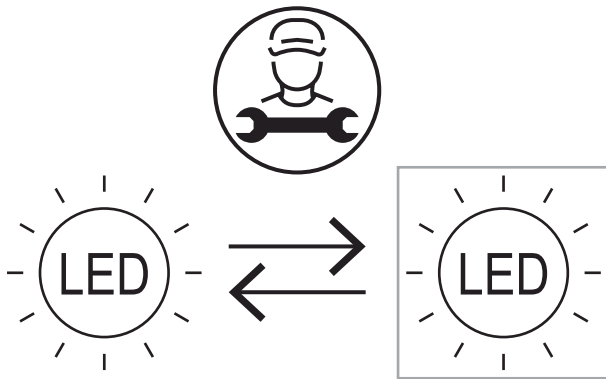

## LED Warranty

G3	Up to 3 years (4000h/year) *4000h = 11h a day x 365 days. Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
----	--

## European Directives

2009/125/EC \* Ecodesign  
2011/65/EU \* RoHS  
2012/19/EU \* RAEE  
2014/30/EU \* EMC  
2014/35/EU \* LVD  
2015/863 \* Amending RoHS  
2017/1369 \* Regulation for Energy Labelling  
2019/2015 \* Regulation for Energy Labelling  
2019/2020 \* Regulation for Ecodesign  
2021/340 \* Amending Reg. Energy Labelling  
2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
CEI EN 60598-1:2022  
CEI EN 60598-2-1:2022  
CEI EN 61000-3-2:2019 (+A1:2021)  
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
CEI EN 61547:2010  
CEI EN 62031:2021 (+A11:2022)  
CEI EN 62471:2010  
IEC/TR 62471-2:2009  
CEI EN 62493:2015  
CEI 34-141:2014

## Logistics data

Item net weight	800 gr
Barcode single item	8011905331177
Number of pieces multiple pack	12
Minimum order quantity	1
Minimum packaging	1 / 12