



## SLIMFLUX BL UGR - PRO

### Typology

Direct lighting LED panel.

### Features

The positioning of the LED sources on a horizontal plate ensures lighting uniformity on the screen surface and excellent efficiency levels.

The backlit panel is composed of a metal material back compartment providing a heat sink function.

The LED sources positioned on a horizontal plate ensure lighting uniformity on the diffuser surface and ensure excellent efficiency levels.

Colour rendering: Ra>90.

### Installation

Consider more depth for recessed installations.

### Material

Painted white aluminium body; high-transmittance PMMA primary optics.

### Usage information

SLIMFLUX 60x60 panels can be used with multi-current dimming power supply, code DELT40D-M.

### Emergency

SLIMFLUX panels can be used with standby emergency kit, code KTEMRO3.

### Notes


Providing greater visual comfort, improved definition of detail and reduction of stress.

<b>PRO</b>	220-240 Vac	Ra >90		50000 h L80B20	IP20 VI IP40 VO	Screws	-25°C +40°C	Risk Group 0	UGR <19
	<b>FLICKER FREE</b>								

### Characteristic data

Power	30 W	Dimmable	No	Input	220-240 Vac	Base	Screws
IP	20	Optical compartment IP	40	Flux	4000 lm	PF	0,9
UGR	<19	Tc	4000 K	Ra	>90	LED Warranty	G5h24
RG	RG0						

## Dimensional characteristics



L	595 mm
L1	595 mm
H	30 mm

## Lighting and photometric features

Flux	4000 lm
CCT nominal colour temperature	4000 K
Colour of the light	Natural light
Colour rendering index	>90
Lifespan	50000 h
LED lifespan	L80B20
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light
UGR	<19

## Electrical characteristics



Rated power	30 W
Input voltage	220-240 Vac
Frequency	50/60 Hz
Dimmable	No
Power factor (PF)	0,9
Operating temperature	-25°C / +40°C

## Photometry

EuLumDat file on the site

## Other Infotech

Flicker Free	Yes
Light source replaceability	Replaceable (LED only) light source by a professional.
Control gear replaceability	Replaceable control gear by a professional.

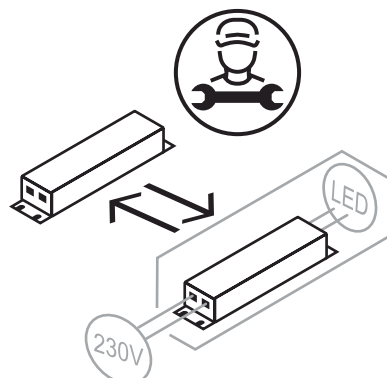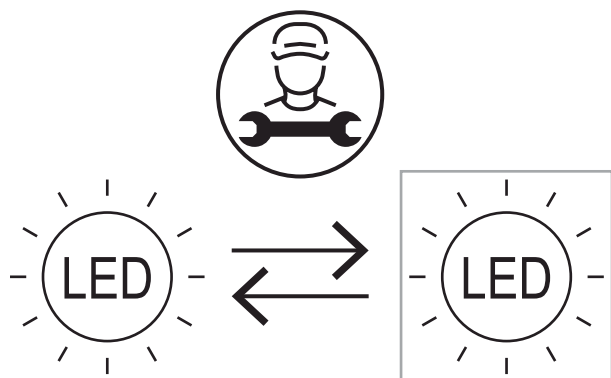

## LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---

## European Directives

2009/125/EC \* Ecodesign  
2011/65/EU \* RoHS  
2012/19/EU \* RAEE  
2014/30/EU \* EMC  
2014/35/EU \* LVD  
2015/863 \* Amending RoHS  
2017/1369 \* Regulation for Energy Labelling  
2019/2015 \* Regulation for Energy Labelling  
2019/2020 \* Regulation for Ecodesign  
2021/340 \* Amending Reg. Energy Labelling  
2021/341 \* Amending Reg. Ecodesign

## Product standards

CEI EN 55015:2020 (+A11:2020)  
CEI EN 60598-1:2022  
CEI EN 60598-2-1:2022  
CEI EN 60598-2-2:2012  
CEI EN 61000-3-2:2019 (+A1:2021)  
CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)  
CEI EN 61547:2010  
CEI EN 62031:2021 (+A11:2022)  
CEI EN 62471:2010  
IEC/TR 62471-2:2009  
CEI EN 62493:2015  
CEI 34-141:2014

## Logistics data

Item net weight	2200 gr
Barcode single item	8011905959531
Number of pieces multiple pack	6
Barcode multiple pack	8011905965976
Minimum order quantity	1
Minimum packaging	1 / 6