



DURASTRIP HE SHORT CUT

Typology

Extreme precision, surprising efficiency.
A high efficiency range to meet the needs of prestigious projects.
Extreme precision, surprising efficiency, more than 140 lm/watt.
A high efficiency range to meet the needs of prestigious projects.
Each model meets specific installation needs and all share excellent efficiency.

Installation

Complete with 3M double-sided tape to attach to the surface.
When using double-sided tape degrease the application surface adequately.

Usage information

Dimmable 0-100% Flicker Free
DALI - DMX - 1-10
Analogue and digital domotic control systems
Push Dali with ZKCDAFF controllers
CASAMBI compatible

Power supply

Max current for single power supply: 4A.

Packaging

Packaged in 5 meters reels.

Binning

SDCM from <2 to <6.

Connections


IP20: terminals with free wires.

PRO	24 Vdc	Ra 90		50000 h L70B50	IP20	-25°C +35°C	Risk Group 1		

Characteristic data

Power	55 W	Beam	120°	Dimmable	Yes	Input	24 Vdc
IP	20	Tc	6000 K	Ra	90	LED Warranty	G5h24
RG	RG1						

Dimensional characteristics

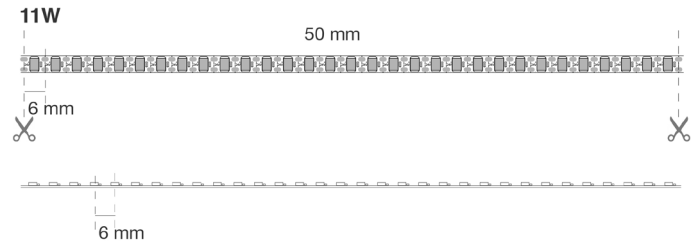

L	5000 mm
L1	5 mm
H	1.5 mm

Cutting pitch	6.5 mm
LED pitch	6 mm

Lighting and photometric features

Beam opening	120°
Nominal flux per mt	1600 lm/m
CCT nominal colour temperature	6000 K
Colour of the light	Cool light
Colour rendering index	90
Lifespan	50000 h
LED lifespan	L70B50
Trigger time	<0,2 s
Heating time up to 60% of full efficiency	Instant Full Light

Electrical characteristics

Rated power	55 W
Input voltage	24 Vdc
Dimmable	Yes
Energy efficiency class	This product contains a light source of energy efficiency class "E"
Operating temperature	-25°C / +35°C

Photometry

	6000K	H(m)	D(m)	E _{max} (lx)
	Ra90		115°	
Fixture Power	11W	1	3.15	548
Source Flux	1600lm	2	6.30	137
Fixture Flux	1600lm	3	9.45	61
Efficacy	145lm/W	4	12.59	34
353179 I _{max} =342cd/klm	I _{max}	5	15.74	22

EulumDat file on the site

LED Warranty

G5h24	Full Guarantee 5 years (24h/24h) Without limitations on the duration of use for the first year, provided the observance of the installation conditions.
-------	---------------------------------------------------------------------------------------------------------------------------------------------------------------

European Directives

2009/125/EC * Ecodesign
 2011/65/EU * RoHS
 2012/19/EU * RAEE
 2014/30/EU * EMC
 2015/863 * Amending RoHS
 2017/1369 * Regulation for Energy Labelling
 2019/2015 * Regulation for Energy Labelling
 2019/2020 * Regulation for Ecodesign
 2021/340 * Amending Reg. Energy Labelling
 2021/341 * Amending Reg. Ecodesign

Product standards

CEI EN 55015:2020 (+A11:2020)
 CEI EN 60598-1:2022
 CEI EN 60598-2-1:2022
 CEI EN 61000-3-2:2019 (+A1:2021)
 CEI EN 61000-3-3:2014 (+EC1:2014/+EC2:2016/+A1:2021/+A2:2022)
 CEI EN 61547:2010
 CEI EN 62031:2021 (+A11:2022)
 CEI EN 62471:2010
 IEC/TR 62471-2:2009
 CEI EN 62493:2015
 CEI 34-141:2014

Logistics data

Barcode single item	8011905353179
Number of pieces multiple pack	20
Minimum order quantity	20
Minimum packaging	20 / 20